



Rollenlager **lose** aufliegend
für Verschiebung in **X - Y** Richtung

Typ 118 G



Variante ohne Aufständering
mit Fixmaß F

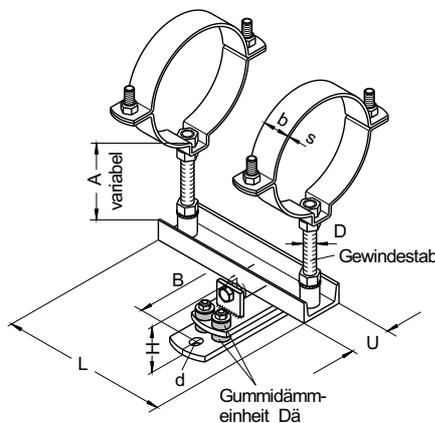

Typ 118 GA
mit Schalldämmung



Alle Maße in mm

gültig für beide Ausführungen								Typ 118 G			Typ 118 GA				
Gr.	Rohr ø	b x s	A Standard	L	D	d	U	F	B	H	Artikel- nummer feuerverzinkt	Dä Stck	B	H	Artikel- nummer feuerverzinkt
1	51.0	30x2,5	90	180	M12	11	40x20	5	95	32	24003655	2	154	46	24003674
	57.0										24003656				24003675
	60.3										24003657				24003676
	70.0										24003658				24003677
	76.1										24003659				24003678
	88.9										24003660				24003679
2	108.0	40x4,0	120	250	M16	14	60x30	6	130	50	24003661	4	180	68	24003680
	114.3										24003662				24003681
	133.0										24003663				24003682
	139.7										24003664				24003683
	159.0										24003665				24003684
	168.3										24002667				24003685
	193.7										24003668				24003686
3	219.1	50x8,0	180	300	M24	18	80x45	3	160	53	24003669	4	245	73	24003687
	244.5										24003670				24003688
	267.0										24003671				24003689
	273.0										24003672				24003690
	298.5										24003673				24003691
4	323.9	50x8,0	180	300	M24	18	80x45	3	160	53	24020686	6	245	73	24003692
	355.6										24020687				24003693

Weitere Durchmesser und A- Maße auf Anfrage. Geben Sie bitte bei Anfragen den genauen Rohrdurchmesser und das gewünschte A- Maß an.



Bestellangaben: Typ... Durchmesser... A - Maß... Oberfläche... Artikelnummer
z. B. 118 GA ø168.3 A= 120 feuerverzinkt 24003685