


Type 118 C



Type 118 CA
with sound insulation

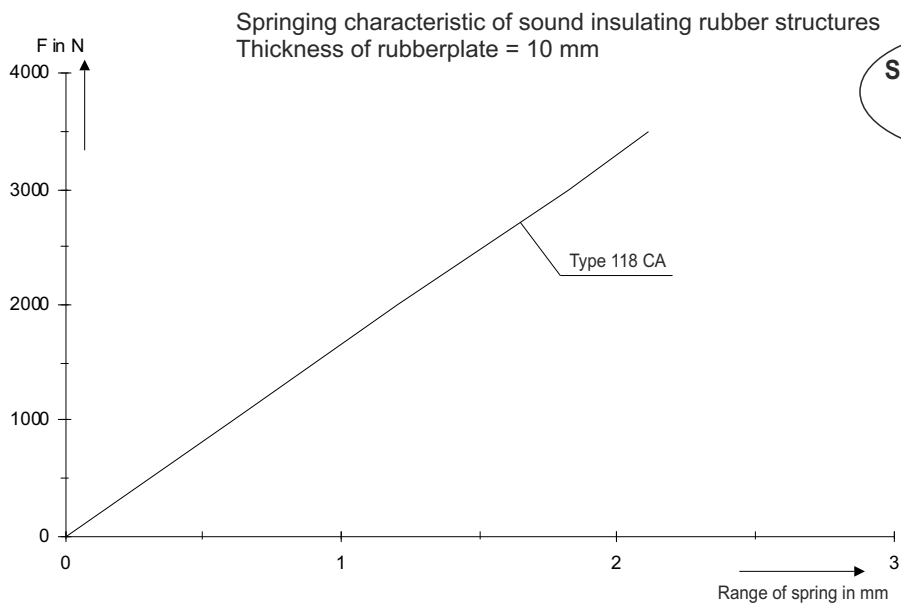

SOUND INSULATED
according to
DIN 4109

Description

Pipe fastener for supporting light exhaust pipes with large pipe movements, caused by temperature changes. The slide bar is generally stored maintenance-free in fibre-glass and PTFE ducts. Two height-adjustable pipe clamps transfer the pipe batch securely into the restraining storage facility. The construction design –CA - is in addition mounted on four sound insulating structures, which guarantee perfect and durable sound insulation. For extremely high radiating temperatures, the insulating unit is equipped with a heat shield. Examples are, exhaust pipes, which are usually not insulated. The dipa® sliding restraining bearing facilities types 118 C and 118 CA are constructed for use horizontally, standing or hanging, and vertically as line fastening.

Combination possibilities with Type

116 L, 116 LA, 116 S, 116 SA 4

Specification

Zinc-coated

Preferable fields of application

Sanitary- and heating technology, aggregate construction