
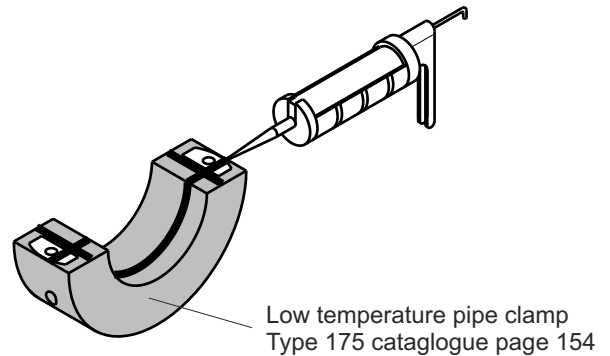


SEAL PASTE

Type 4045

for low temperature pipe clamps Type 170 - 175

Mounting example

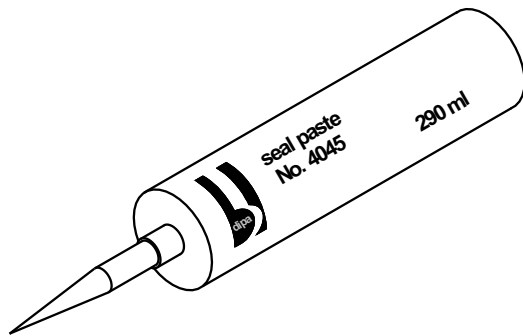

Technical data

Temperature resistance: - 40°C to + 80°C
 Operating temperature: from 5°C to 40°C
 Skin forming: ca. 2 - 3 hours
 Full cure: after ca. 24 hours
 Shore - A - density (DIN 53505): ca. 25
 Storage time (5 - 20°C standing up): 9 month
 Fire protection classification: B 2

Ecology: silicone free
 bitumen free
 smell neutral
 solvent free
 very low emission

Description

One component joint sealant polymer based

Specification

290 ml cartridges

Preferable fields of application

dipa® low temperature pipe clamps Type 170 to 175 catalogue pages 147ff
 See also assembly instructions Type 170, 175, 171 and 173 F catalogue pages 175f



Ordering designations: Type...
 e.g. 4045

Number of pieces...
 2

Item number...
 31004966