


PIPE CLAMPType **114 Mu-Gu**

two pieces, with elastomer inlay

dipa

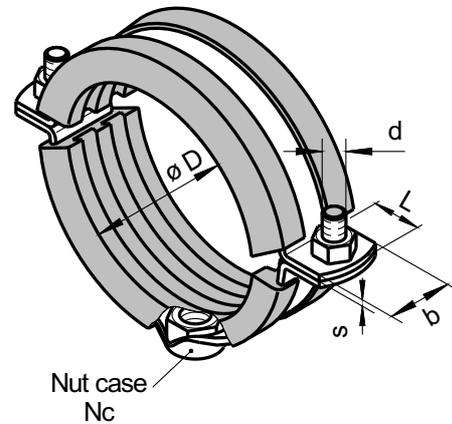

SOUND INSULATED
according to
DIN 4109

All dimensions in mm

Permissible tensile strength* [kg]							
Material b x s	until nominal diameter [mm]						
	40	100	400	500	700	1000	1400
20x1,5	60						
20x2,0		100	60	45	30		
30x2,5		180	130	115	90	70	40
40x4,0		320	240	220	160	140	80

*) valid for ceiling mounting usage with tube types who do not deform themselves at mentioned load factors.

Description

Two pieces pipe clamp made of zinc-coated band steel or stainless steel quality A2 or A4 with punched pipe clamp connection screws. Suitable for all pipe types. The accurately fitting nut case receives an inlaid nut against skewing and provides in connection with a hex nut a clean, heavy duty, form-fitting connection to the threaded rod.

Deliverable in diameter range from 15 mm to 1400 mm.

Preferable fields of application

Air-, climate-, sanitary- and heating technology.

Also STAINLESS available
RUST
PROOF

Material b x s	$\varnothing D$	Nc	L	d
20x1,5	15.0 17.2 18.0 consecutive pipe diameter until 38.0	for M 8	15	M 6
20x2,0	42.0 42.4 44.5 consecutive pipe diameter until 710.0	for M 8	15	M 6
30x2,5	48.3 51.0 54.0 consecutive pipe diameter until 1400.0	optionally for M 8 M10 M12	20	M 8
40x4,0	80.0 88.9 90.0 consecutive pipe diameter until 450.0	optionally for M12 M16	35	M12

Other diameters on request.
Please tell us the requested
pipe diameter.